

# Futaba


# S3157

Micro Servo for Small Electric Powered Models

\*Specifications are subject to change without prior notice.

## [RATINGS]

- Operating speed : 0.10 sec/60° at 4.8V  
0.09sec/60° at 6.0V
- Output torque : 1.5 kg·cm at 4.8V  
(20.8 oz.·in. at 4.8V)  
1.7kg·cm at 6.0V  
(23.6 oz.·in. at 6.0V)
- Dimensions : 21.8 × 11 × 23.2 mm  
(0.86 × 0.43 × 0.91 in.)
- Weight : 8.5 g (0.30 oz.)

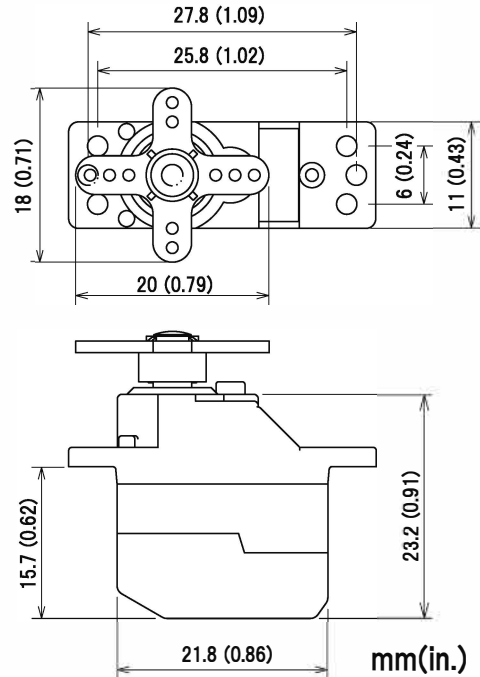

## USAGE PRECAUTIONS

The S3157 servo is a micro servo for small electric powered models. Pay special attention to the following points.

- Do not use S3157 servos with gas-power engine models, large gliders or other models that require high torque.
- Using the supply voltage higher than 6.0V or applying high load to the servo will shorten the life.
- Always use the servo horn specially designed for this micro servo. Do not use conventional servo horns.
- Excessive force or shock to the servo horn may damage the ultra mini precision gears inside the servo.
- Never connect a battery in reverse. Otherwise, it may cause fire on the servo.
- To use a BEC battery for multiple servos simultaneously, be sure to select the battery with a sufficient capacity.
- Please do the linkage after confirming the position of the neutral with the receiver and transmitter connected.