

Futaba®


BALL BEARING SERVO

S3004

Pulse width control system

(Ball bearing standard servo)

- Power requirement:
4.8 V or 6 V (common with receiver) Current
drain: 8 mA (at 6 V / Idle)
- Output torque: 3.2 kg-cm (at 4.8 V)
- Operating speed: 0.23 sec/60 degree (at 4.8 V)
- Size: 1.59x0.78x1.41" (40.4x19.8x36 mm)
- Weight: 1.3 oz (38.0 g)

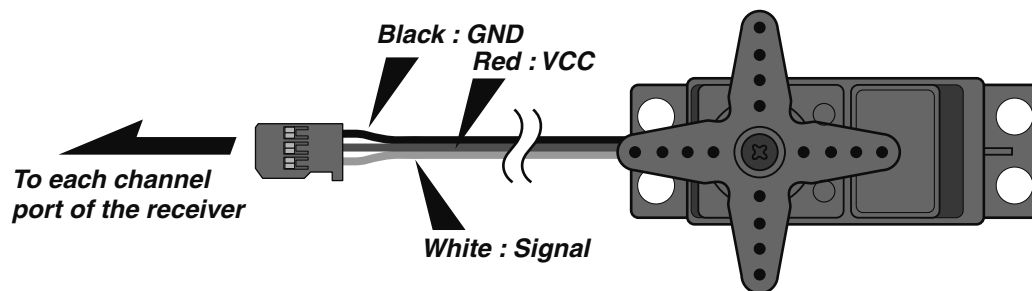

FUTABA CORPORATION