

Futaba®


METAL GEAR SERVO

S3016

Pulse width control system

(Metal gear standard servo)

- Power requirement:
4.8 V or 6 V (common with receiver)
- Output torque: 4.2 kg-cm (at 6.0 V)
- Operating speed: 0.20 sec/60 degree (at 6.0 V)
- Size: 1.22x0.63x1.21" (31.0x16.0x30.7 mm)
- Weight: 1.2 oz (34.0 g)

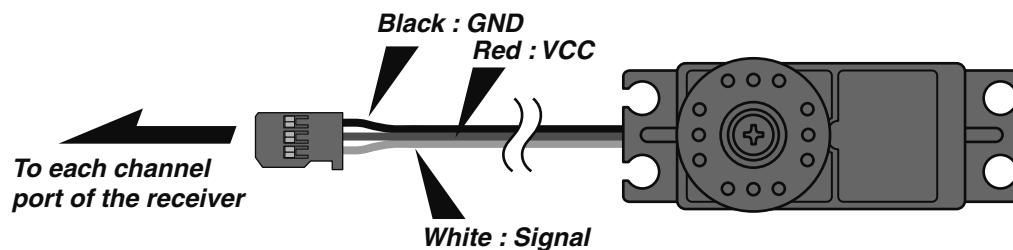

FUTABA CORPORATION